

## DT 109

Headset with  
dynamic Microphone



### FEATURES

- Highly sensitive headphone and microphone transducers
- Excellent ambient noise attenuation
- Capable of handling very high SPL
- Rugged construction
- Excellent comfort for long-term wearing
- Modular construction for easy servicing

### APPLICATIONS

For many years, the DT 109 has been the standard headphone /microphone combination for live, remote broadcasting, studio, film, TV and language laboratory application. Rugged, field-servicable construction. The headphone transducers feature extended frequency response. Adjustable, noise-cancelling microphone provides clear, audible speech transmission.

### VERSIONS

DT 109	Headset, 200/50 $\Omega$ , grey, with bare-ended K 109.00 cable . . . . .	Order # 421.901
DT 109	same as above, but black . . . . .	Order # 421.928
DT 109	Headset, 200/400 $\Omega$ , grey, with bare-ended K 109.00 cable . . . . .	Order # 421.049
DT 109	same as above, but black . . . . .	Order # 422.045
DT 109.28	Headset, 200/400 $\Omega$ , grey, with K 109.28 cable with 4-pin XLR-socket, 1.5 m long . . . . .	Order # 453.439
DT 109.28	same as above, but black . . . . .	Order # 453.420
DT 109.38	Headset, 200/50 $\Omega$ , grey, with K 109.38 cable with 5-pin XLR-plug, 1.5 m long . . . . .	Order # 453.455
DT 109.38	same as above, but black . . . . .	Order # 453.447
DT 109.42	Headset, 200/50 $\Omega$ , grey, with K 109.42 cable with 4-pin XLR-plug, 1.5 m long . . . . .	Order # 453.471
DT 109.42	same as above, but black . . . . .	Order # 453.463

### OPTIONAL ACCESSORIES

K 109.00	Straight bare-ended cable, 3 m long . . . . .	Order # 127.949
K 109.28	Straight cable with 4-pin XLR-socket, 3 m long . . . . .	Order # 220.132
K 109.38	Straight cable with 5-pin XLR-plug, 1.7 m long . . . . .	Order # 406.538
K 109.40	Straight cable with 3-pin XLR-plug and 1/4" jack (6.35 mm), 1.5 m long . . . . .	Order # 449.121

### SPARE PARTS

EDT 100 S	Ear pads, soft PVC, circumaural . . . . .	Order # 407.003
EDT 100 P	Ear pads, plush, circumaural . . . . .	Order # 445.576
EDT 100 T	Ear pads, cotton jersey, circumaural . . . . .	Order # 445.584
BN 59-18/A	Headband pad . . . . .	Order # 108.715
BN 56-79/A	Pop screen (5 pcs.) . . . . .	Order # 108.677

#### Germany

Theresienstr. 8  
D-74072 Heilbronn  
Tel. +49 (0)71 31 / 6 17-0  
Fax +49 (0)71 31 / 617-224  
E-mail: info@beyerdynamic.de  
Internet: www.beyerdynamic.de

#### United States

56 Central Ave.  
Farmingdale, NY 11735  
Tel. +1 (631) 293-3200  
Fax +1 (631) 293-3288  
E-mail: salesUSA@beyerdynamic.com  
Internet: www.beyerdynamic.com

#### Great Britain

17 Albert Drive  
Burgess Hill RH15 9TN  
Tel. +44 (0)1444 / 258 258  
Fax +44 (0)1444 / 258 444  
E-mail: sales@beyerdynamic.co.uk  
Internet: www.beyerdynamic.co.uk

## TECHNICAL SPECIFICATIONS

### Headphone

Transducer type	Dynamic
Operating principle	Closed
Frequency response	30 - 20,000 Hz
Nominal impedance	400 $\Omega$ $\pm$ 10% per cartridge*
Nominal SPL at 1 kHz	94 dB
T.H.D.	< 1%
Power handling capacity	1000 mW $\hat{=}$ 124 dB
Ambient noise attenuation	approx. 20 dBA
Sound coupling to the ear	Circumaural
Headband pressure	approx. 4.5 N
Weight (without cable)	390 g
Cable length	1.5 m


### Microphone

Transducer type	Dynamic
Operating principle	Pressure gradient
Frequency response	40 - 12,000 Hz
Polar pattern	Hypercardioid
Output voltage	approx. 2.5 mV at a distance of 5 cm
Nominal impedance	200 $\Omega$
Load impedance	$\geq$ 1000 $\Omega$

\*more impedances available

## FREQUENCY RESPONSE & POLAR PATTERN

This frequency response curve (measuring tolerance  $\pm$  2.5 dB) and polar pattern correspond to a typical production sample for this microphone.

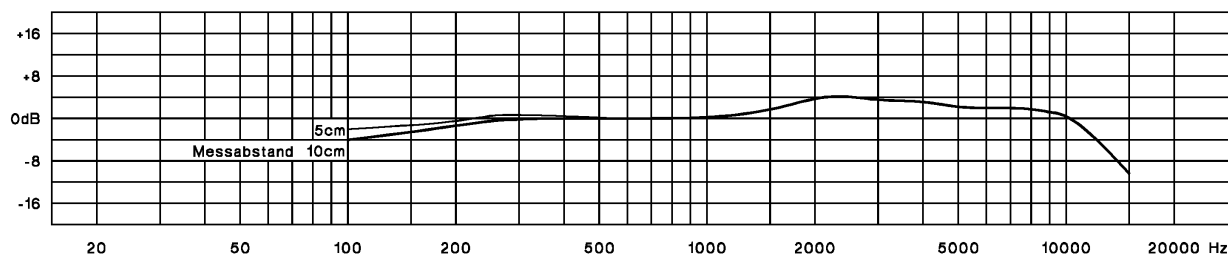

## WIRING DIAGRAM

